



# INSTRUCTIONS


## Install Summary

- Place ITV PRO system in an accessible location for ease of filter replacement
- Ensure that the system is mounted vertically with a minimum of 2" clearance from the bottom of the system to allow for filter replacement
- Do not mount over electrical wiring or where water may occur damage
- Cold water inlet feed only. Water Temp must not exceed 100°F
- Do not use with water that is microbiologically unsafe or unknown quality without adequate disinfection before or after the system
- System should be installed in compliance with state and local laws and regulations.


## Install Instructions

- Turn off water supply
- Secure the head/manifold assembly to the wall using appropriate wall anchors
- Make connections to the head using back-up wrenches where needed making sure not to over tighten fittings. Do not solder connections
- Install each cartridge into the head by lining up the ears of the filter to the notches of the head
- Push upward into the head until it seats, then turn clockwise 1/4" until the filter stops
- Slowly turn the water supply back on checking for leaks.
- Flush system for one minute to prior to use

## 3-WAY BYPASS FOR SYSTEMS

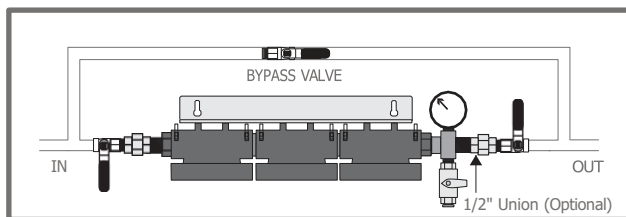

## CORRECT PLACEMENT

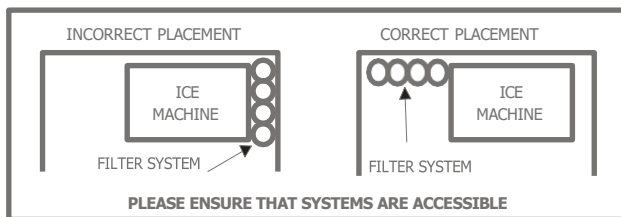

## System Specifications

Model #	PRO101K	PRO102K	PRO161K	PRO162K
Connection Size	3/8" MPT	3/8" MPT	1/2" MPT	1/2" MPT
Sediment Capacity (Gal.)	10,000	20,000	15,000	30,000
Service Flow (Gpm.)	1.65	3.30	2.00	4.00
Dimensions (HWD)	15.25" x 7.5" x 4"	15.25" x 11.5" x 4"	20.85" x 7.5" x 4"	20.85" x 11.5" x 4"
Replacement Cartridge	PRO-10	PRO-10 x (2)	PRO-16	PRO-16 x (2)

**Operating Pressure:** 30 psi. / 125 psi.

**Operating Temperature:** 35° - 100°F (2° - 38°C)