




GR 655

THREE PHASE
400 V / 50 Hz

MODULAR GRANULAR ICE MACHINE

FEATURES CARACTERÍSTICAS

- ▶ **PRODUCES WET GRANULAR ICE**
PRODUCE HIELO GRANULAR HUMEDO
- ▶ **THE MOST EFFICIENT EVAPORATOR OF THE MARKET, LOWER ENERGY CONSUMPTION AND HIGHER ICE PRODUCTION**
EL EVAPORADOR MÁS EFICIENTE DEL MERCADO MENOR GASTO ENERGÉTICO, MAYOR PRODUCCIÓN DE HIELO
- ▶ **EVAPORATOR WITHOUT GASKETS OR SEALS**
EVAPORADOR SIN JUNTAS DE ESTANQUEIDAD NI RETENES
- ▶ **STAINLESS STEEL AUGER WITH RESILIENT COATING TO MAXIMIZE LIFESPAN**
HUSILLO DE ACERO INOXIDABLE CON POSTERIOR TRATAMIENTO SUPERFICIAL PARA AUMENTAR SU VIDA ÚTIL
- ▶ **POWERFUL SPEED REDUCER ON TOP**
POTENTE REDUCTOR DE VELOCIDAD EN LA PARTE SUPERIOR
- ▶ **AISI 304 STAINLESS STEEL BODY**
CARROCERÍA EN ACERO INOXIDABLE AISI 304
- ▶ **ELECTROMECHANICAL CONTROL SYSTEM**
SISTEMA ELECTROMECÁNICO DE CONTROL
- ▶ **ICE DROPS OUT THROUGH THE OPENING ON THE BOTTOM OF THE UNIT**
EL HIELO SALE POR UNA ABERTURA EN LA PARTE INFERIOR DE LA UNIDAD
- ▶ **ON/OFF LIGHTED ROCKER SWITCH IN FRONT PANEL**
INTERRUPTOR LUMINOSO DE FUNCIONAMIENTO ON/OFF EN EL PANEL FRONTAL
- ▶ **TROPICALIZED MACHINES (T CLASS)**
MÁQUINAS TROPICALIZADAS (CLASE T)
- ▶ **NATURAL GAS R290 WITH VERY LOW GLOBAL WARMING POTENTIAL WHICH ALSO REDUCES THE ENERGY CONSUMPTION**
GAS NATURAL R290 CON MUY BAJO ÍNDICE GWP EL CUAL TAMBIÉN REDUCE EL CONSUMO ENERGÉTICO
- ▶ **THE INSTALLATION OF AN ANTI-SCALE FILTER AND PERIODIC CLEANING ARE ADVISED IN AREAS WITH MEDIUM OR HIGH LIMESCALE CONTENT (HARD WATER)**
SE ACONSEJA LA INSTALACIÓN DE UN FILTRO ANTICAL Y LIMPIEZA PERIÓDICA EN CASO DE AGUAS CON CONTENIDO EN CAL MEDIO O ALTO (AGUAS DURAS)

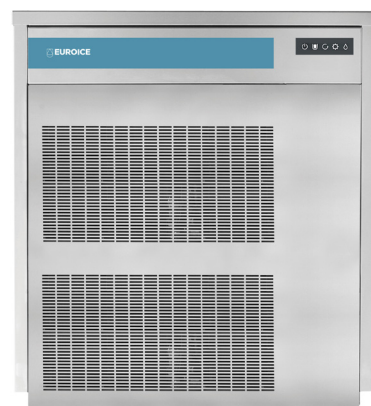

						
GR 655 A		700	625	Width 675 Depth 548 Height 796	Width 770 Depth 665 Height 940	WET GRANULAR ICE 25% RESIDUAL WATER CONTENT
GR 655 W		707	634			

ACCESSORIES ACCESORIOS


INCLUDED




NOT INCLUDED (OPTIONAL)



RECOMMENDED BINS DEPÓSITOS RECOMENDADOS

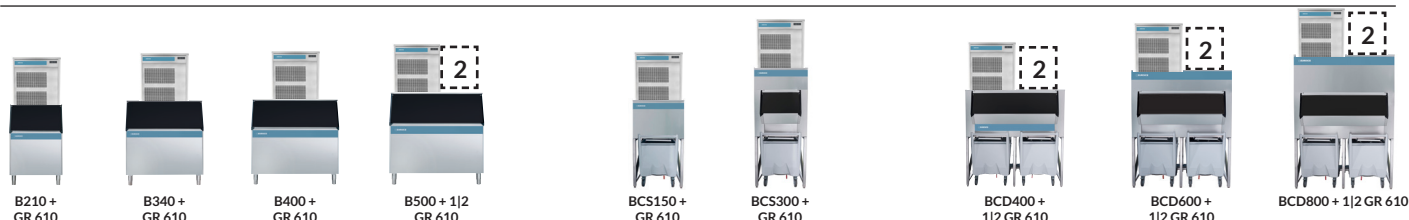





RIGHT SIDE VIEW
VISTA LATERAL DERECHA




FRONTAL VIEW
VISTA FRONTAL



REAR VIEW
VISTA TRASERA

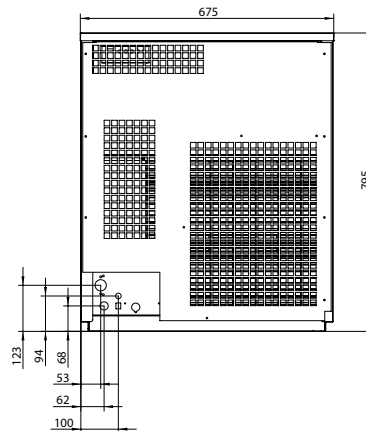

CENTRAL CROSS SECTION VIEW OF THE BASE
VISTA DE LA BASE DESDE SECCIÓN CENTRAL

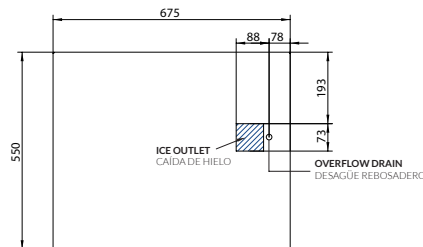

*All measurements in mm.
*Todas las cotas en mm.

OPERATING CONDITIONS CONDICIONES DE OPERACIÓN

PRODUCTION 50Hz PRODUCCIÓN 50 Hz

±10% V

10°C/43°C

5°C/38°C

1 bar/6 bar



V	Hz	ph
230	50	3N



GR 655 AIR COOLED

°C °F	10° 50°	15° 60°	21° 70°	30° 86°
10° 50°	700	660	610	490
21° 68°	655	625	575	460
32° 90°	585	565	517	425
43° 109°	530	500	465	395



GR 655 WATER COOLED

°C °F	10° 50°	15° 60°	21° 70°	30° 86°
10° 50°	707	665	625	503
21° 68°	660	634	577	466
32° 90°	593	569	522	435
43° 109°	540	511	479	404

MODELS MODELOS



		(W)	(BTU/h)	(W) 43°C	(n.)	(mm²)	FUSE	(Kwh)	(l/h)	(W)	(BTU/h)	(Kg)	(Kg)	(m³)
GR 655 A		5.218	17.809	1.585	3	1,5	20	5,1	26	3.835	13.085	105	117	0,48
GR 655 W		5.218	17.809	-	3	1,5	20	-	-	3.835	13.085	105	117	0,48



EUROICE
P.I. La Reva, Av. Gremis, 1
46190 Ribarroja - Valencia - España
Phone: +34 96 166 76 36 | Fax: +34 961 668 944
www.euroice.it/ | info@euroice.it



SERVICE
SERVICIO ASISTENCIA TÉCNICA
service@euroice.it
+34 961 667 639
8:00AM | 7:00PM



Subject to certain limitations
and exclusions. Only spare parts.
Sujeto a limitaciones y exclusiones.
Solo piezas de repuesto.

