



SS 400 L

THREE PHASE
400 V / 50 Hz

MODULAR ICE CUBE MACHINE

FEATURES CARACTERÍSTICAS

- ▶ **PRODUCES SOLID GOURMET CRYSTAL CLEAR ICE CUBES**
PRODUCE CUBITOS GOURMET MACIZOS Y CRISTALINOS
- ▶ **MACHINE WITH BIGGEST PRODUCTION IN ITS RANGE**
LA MÁQUINA DE MAYOR PRODUCCIÓN EN SU SEGMENTO
- ▶ **LOWEST ELECTRICITY CONSUMPTION, ONLY 18 KWH/100 KG ICE (DATA WITH 60 GR CUBE SIZE). THAT MEANS UNTIL 24% ELECTRICITY COST REDUCTION VS. OTHER MODELS IN THE MARKET**
EL MÁS BAJO CONSUMO ELÉCTRICO, SÓLO 18 KWH/100 KG DE HIELO (DATO MEDIDO CON EL CUBITO DE 60 GR). ESTO SUPONE UN GASTO DE ELECTRICIDAD HASTA UN 24% INFERIOR A OTROS MODELOS DEL MERCADO
- ▶ **LOWEST WATER CONSUMPTION, ONLY 1,68 L/KG ICE. THAT MEANS UNTIL 35% WATER COST REDUCTION VS. OTHER MODELS IN THE MARKET**
EL MÁS BAJO CONSUMO DE AGUA, SÓLO 1,68 L/KG HIELO, ESTO SUPONE UN 35% DE REDUCCIÓN DE GASTO EN AGUA RESPECTO A OTRAS MÁQUINAS DEL MERCADO
- ▶ **ELECTRONIC CONTROL MACHINE. IT ADAPTS CONTINUOUSLY TO ANY VARIATION OF AMBIENT AND WATER TEMPERATURES: ICE CUBES ARE ALWAYS IDENTICAL**
MÁQUINA CON CONTROL ELECTRÓNICO. SE ADAPTA CONTINUAMENTE A CUALQUIER VARIACIÓN DE TEMPERATURA AMBIENTE O DEL AGUA: LOS CUBITOS SON SIEMPRE IDENTICOS
- ▶ **EXTERNAL WARNING LIGHTS. EVERY OPERATION IS UNDER CONTROL**
TESTIGOS LUMINOSOS DE ALARMA. CADA OPERACIÓN SE TIENE BAJO CONTROL
- ▶ **CLEANING SWITCH ALLOWS AN EASY CLEANING TASK**
EL BOTÓN DE LIMPIEZA PERMITE UNA TAREA DE LIMPIEZA FÁCIL



	 24 H Kg	 10°C 10°C (Kg)	 21°C 15°C (Kg)	 (mm)	 (mm)	
SS 400 L A		430	409	Width 1.321 Depth 638 Height 978	Width 1.410 Depth 740 Height 1.115	SS L 36/40cc 38 (Ø) x 38 mm (H) <i>*Average dimensions Dimensiones promedio</i>
SS 400 L W		430	405			

ACCESSORIES ACCESORIOS

INCLUDED



WATER INLET FILTER GASKET
JUNTA DE FILTRO DE ENTRADA DE AGUA

WATER INLET HOSE
MANGUERA DE ENTRADA DE AGUA

WATER OUTLET HOSE
MANGUERA DE DESAGÜE

NOT INCLUDED (OPTIONAL)



ANTI-LIMESCALE FILTER
FILTRO ANTICAL

PARTICLE FILTER
FILTRO ANTIPARTÍCULAS

ANTI LIMESCALE & ANTI-CHLORINE FILTER XL TWIN
CS112 FILTRO ANTICLORO Y ANTICAL XL TWIN CS112

CALKLIN 200 CLEANER
PRODUCTO ANTICAL

STACKING KIT
KIT APILADO

RECOMMENDED BINS DEPÓSITOS RECOMENDADOS



B500 + SS 400



BCD400 + SS 400




BCD600 + SS 400




BCD800 + SS 400




RIGHT SIDE VIEW
VISTA LATERAL DERECHA




FRONTAL VIEW
VISTA FRONTAL

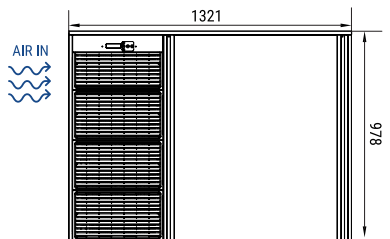

REAR VIEW
VISTA TRASERA

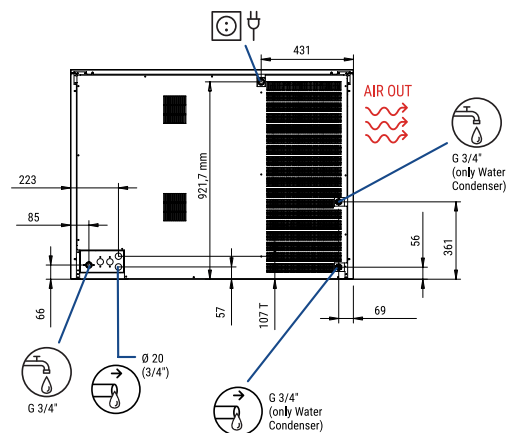

CENTRAL CROSS SECTION VIEW OF THE BASE
VISTA DE LA BASE DESDE SECCIÓN CENTRAL

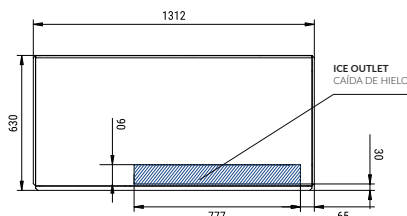

* All measurements in mm.
* Todas las cotas en mm.

OPERATING CONDITIONS CONDICIONES DE TRABAJO

PRODUCTION 50Hz PRODUCCIÓN 50 Hz

±10% V

5°C/43°C

5°C/35°C

1 bar/6 bar

192 Ice cubes/cycle

V	Hz	ph
400	50	3N



SS 400 L AIR COOLED

°C °F	10° 50°	15° 60°	21° 70°	30° 86°
10° 50°	430	420	390	350
21° 68°	418	409	373	345
32° 90°	395	384	345	315
43° 109°	350	340	300	260



SS 400 L WATER COOLED

°C °F	10° 50°	15° 60°	21° 70°	30° 86°
10° 50°	430	415	400	350
21° 68°	420	405	380	338
32° 90°	400	380	360	315
43° 109°	380	360	334	290

MODELS MODELOS

SS 400 L A

SS 400 L W



SS 400 L A		13.500	46.064	3.350	5	2,5	16	20,6	30,6	8.613	29.389	165	191	1,16
SS 400 L W		13.500	46.064	3.350	5	2,5	16	18,3	273,2	8.613	29.389	165	191	1,16



EUROICE
P.I. La Reva, Av. Gremis, 1
46190 Ribarroja - Valencia - España
Phone: +34 96 166 76 36 | Fax: +34 961 668 944
www.euroice.it/ | info@euroice.it



SERVICE
SERVICIO ASISTENCIA TÉCNICA
service@euroice.it
+34 961 667 639
8:00AM | 7:00PM



Subject to certain limitations
and exclusions. Only spare parts.
Sujeto a limitaciones y exclusiones.
Solo piezas de repuesto

